


NEW FOR 2005...

DuoScreed™



**Form-to-form
and wet screeding
with one machine**

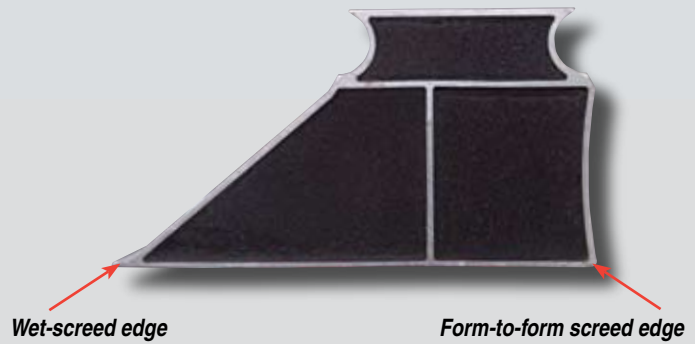

Construction Starts Here

www.multiquip.com



DuoScreed

Redesigned for 2005, Multiquip's DuoScreed utilizes a unique blade profile that enables one person to strike-off concrete floors. The screed's vibratory action embeds aggregate and reduces air voids, producing a strong, dense slab, while eliminating the strenuous, time-consuming labor of manual screeding.


The DuoScreed is ideal for a wide range of applications. Unlike competitive designs (which require different blades for each application), the DuoScreed uses a unique reversing blade. One side is used for standard form-to-form screeding, and the other side is for wet screeding.

- **Flexible drive shaft** requires no maintenance.
- **Fingertip throttle control** adjusts vibrator speed.
- **Blade widths available in sizes up to 20 feet long.**
- **Lightweight blade construction** — one-piece extruded aluminum, less than two pounds per linear foot.
- **Easy to use** — highly maneuverable around pipes or obstructions.
- **Unique reversing blade** — power unit is easily rotated 180 degrees to allow form-to-form or wet screeding.
- **Adjustable control handle** — customize for operator height and comfort.
- **Portable design** — the blade is quickly removed without tools; handles fold for storage.
- **Honda powered** — 1.5 HP four-stroke engine


Specifications

Model.....	DSGPULW
Blade widths (ft.)	6, 8, 10, 12, 14, 16, 18*, 20*
Blade construction.....	Aluminum
Engine	Honda GX-35SAT
HP.....	1.6
Drive system.....	Flexible shaft
Power Unit weight.....	32 lb.
* 18 and 20ft. blade widths require two power units.	

Your Multiquip dealer is:

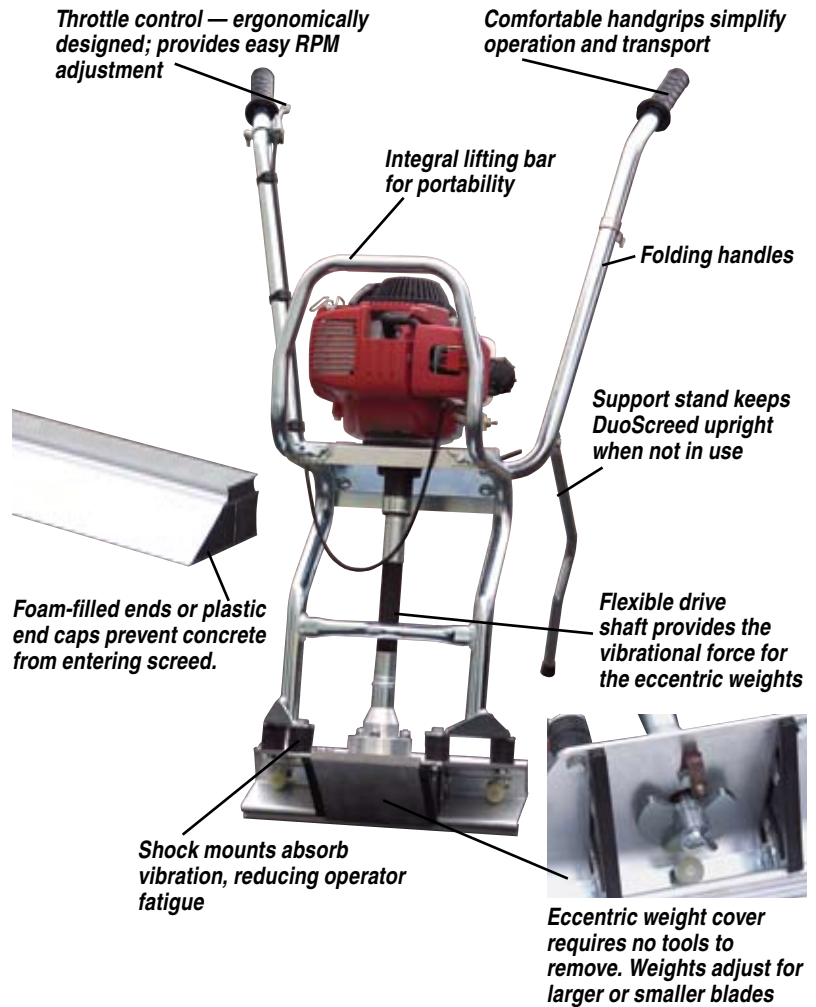

© COPYRIGHT 2006, MULTIQIP INC.

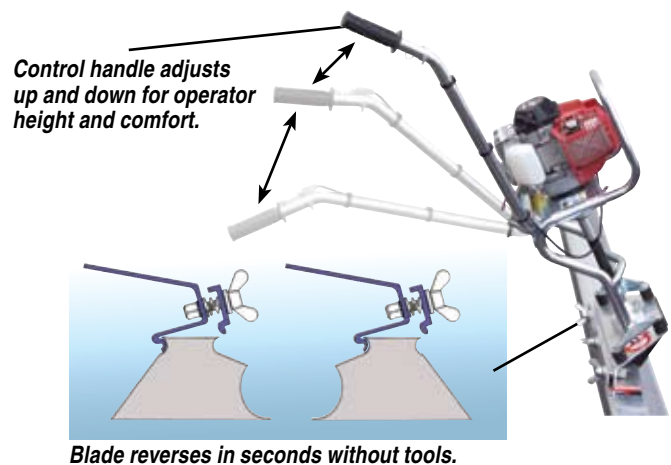

MULTIQIP INC.
 POST OFFICE BOX 6254
 CARSON, CA 90749
 310-537-3700 • 800-421-1244
 FAX: 310-537-3927
 E-MAIL: mq@multiquip.com
 www.multiquip.com